

# TG01 Swing Turnstile

Voice broadcast

Attractive LED Strip

High Speed DC Brushless Motor


Passage Width 650mm~1100mm

Single directional or Bi-directional mode

Infrared sensor alarm function

Anti-reverse function


Anti-collision

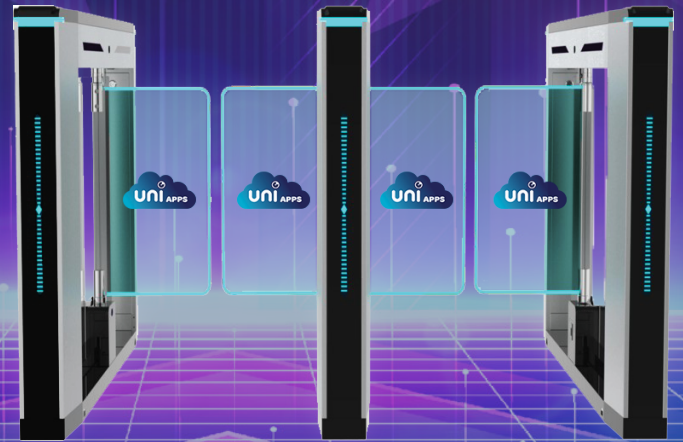

## Specification

Description	Parameters
Body Material	Acrylic Glass, SS304 Stainless Steel, 1.5mm
Door Dimension (Single Panel)	400mm(W) x 560mm(H)
Door opening / closing speed	Programmable < 1 sec
Optimal flow rate	20 to 25 people per minute
Power supply	AC220+10%, 50Hz
Power Consumption	10w (Standby) / 32w (Operational)
Motor	DC Brushless Motor, 140W/24V
Input Connection	Dry contact pulse > 500ms
Working environment	Indoor only
Working Temperature	-10°C - 60°C
Relative Humidity	≤ 90%
Passage Width	600mm
Gate Door Material	12mm acrylic
Cabinet Dimension	1600(L) x 150(W) x 980(H) mm
IP Rating	IP 52

## LED Strip -Indicator

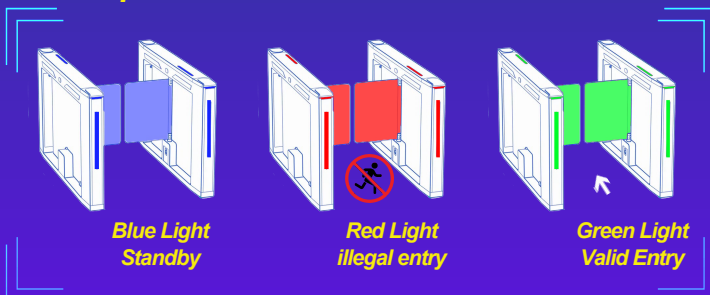

## System Integration

